

abhiyanlam  
TIMELESS DECOR

LUMINOUS  
SHINY TOUCH



Scan this QR code to  
download E-Catalogue

abhiyanlam  
TIMELESS DECOR

LUMINOUS  
SHINY TOUCH

## ABHIYAN DECORATIVE INDIA LLP

### CORP. & MARKETING OFFICE

B-1107, West Gate, Makarba,  
Ahmedabad-380051, India.

☎ 1800 572 7547 ✉ sales@abhiyangroup.in 🌐 www.abhiyanlam.in





abhiyan<sup>®</sup>lam  
TIMELESS DECOR

L U M I N O U S   C O L L E C T I O N

Unique designs,  
unstoppable durability, the future of  
inspired spaces

# STORY

Crafting spaces with  
design that sparks imagination  
and endless possibilities

abhiyan<sup>®</sup>lam  
TIMELESS DECOR


Luminous brings design to life, enhancing every space in its purest form. With a focus on sharp, distinctive finishes, it's the collection that turns ordinary spaces into statements. Simple, striking, and built to last, Luminous reshapes environments with a clean, modern vibe that speaks volumes.

## SPECIAL FEATURES



**Available Size :**  
2440 x 1220 (8 ft x 4 ft)  
Thickness - 1.5 mm (±10%)

**Edge Banding Size :**  
Size : 25mm (±5%)  
Thickness - 1.2 mm

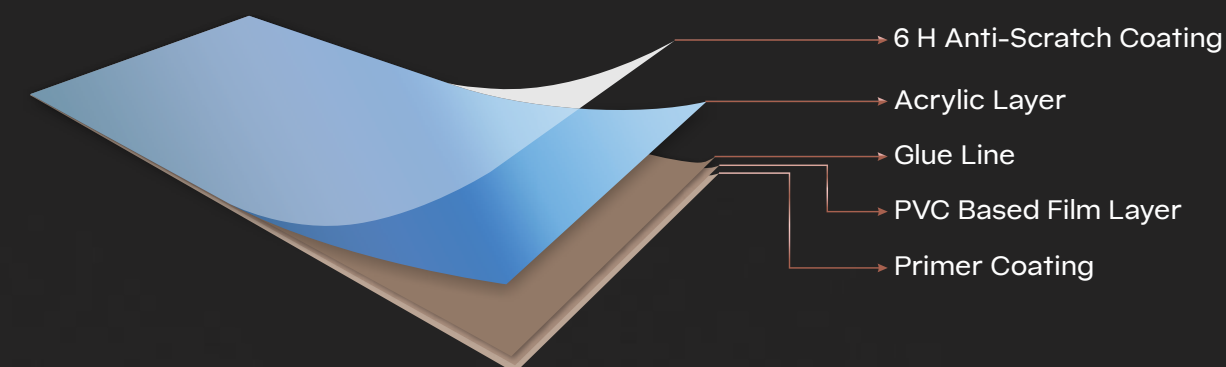


### IMPORTANT INFORMATION

#### Air bubble formations on Laminate:


- \* Using water-based adhesive or other than PVACP (Polyethylene Vinyl Acetate co-polymer) adhesive may also lead to air bubbles after the installation of acrylic laminates. We recommend using adhesive.
- \* Bonding of acrylic laminates under a high humidity atmosphere.
- \* Using uneven surfaces substrate (Plywood, MDF, Particle Board) Lead to a particular area of acrylic laminates and air bubble appear at that area after the installation.
- \* Due to uncertain weather conditions, base substrate may absorb moisture and after a few days of installation base substrate gradually loses moisture resulting in air bubble formation between acrylic laminate and substrate.
- \* When more than 8' x 2' of Acrylic laminates is used for paneling, it can lead to air bubbles after installation.
- \* Lack of bonding/pressing during the time of installation of acrylic laminates may lead to air bubbles.
- \* Acrylic laminates should be kept evenly straight. If the laminates are in roll form, it should be kept straight for a minimum 48 hours and then can press and laminate on the surface for better results.

Abhiyan is not responsible for any damage, cracks, bubbles or colour fading if the sheets are not checked when delivered and are not properly applied as instructed above.

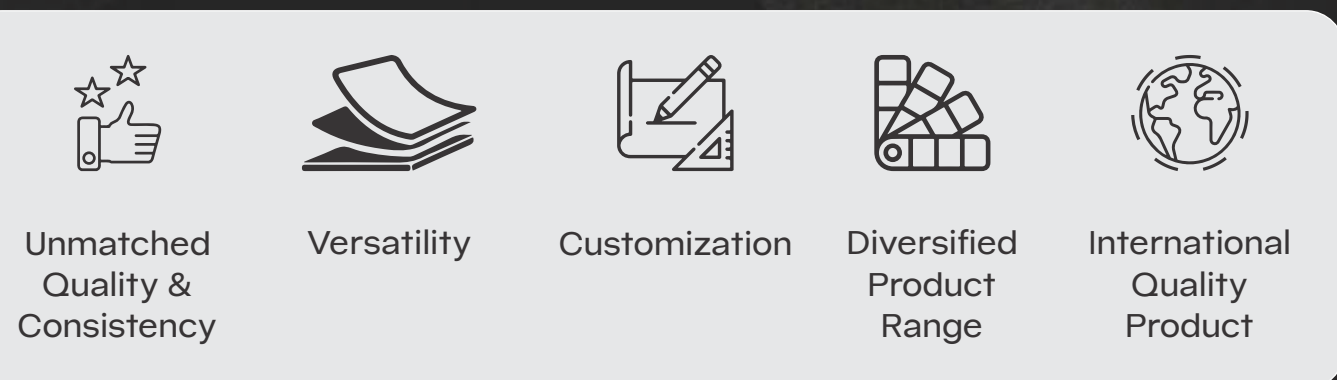

- \* 50% lighter than real glass.
- \* Can be written with marker (high-gloss) or chalk (matt).
- \* Impact resistant and 10 times more durable than real glass.
- \* Colour and UV are stable even in harsh conditions.
- \* Scratch resistant even in daily use due to hard coat finish.
- \* Easy to clean thanks to dirt-resistant coating.


# COLLECTION

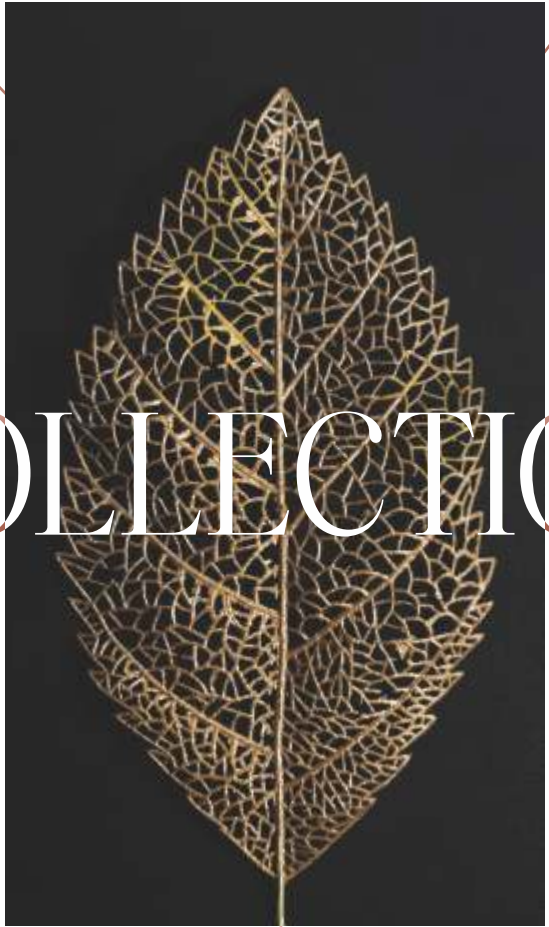

09  
3MM FLUTED



25-28  
SPARKLE



29-32  
METALLIC



13  
2.5MM FLUTED



13-16  
SOFT TOUCH




21-24  
STONE



17-20  
MARBLE




33-37  
GLASSY COLOURS



38  
MIRROR




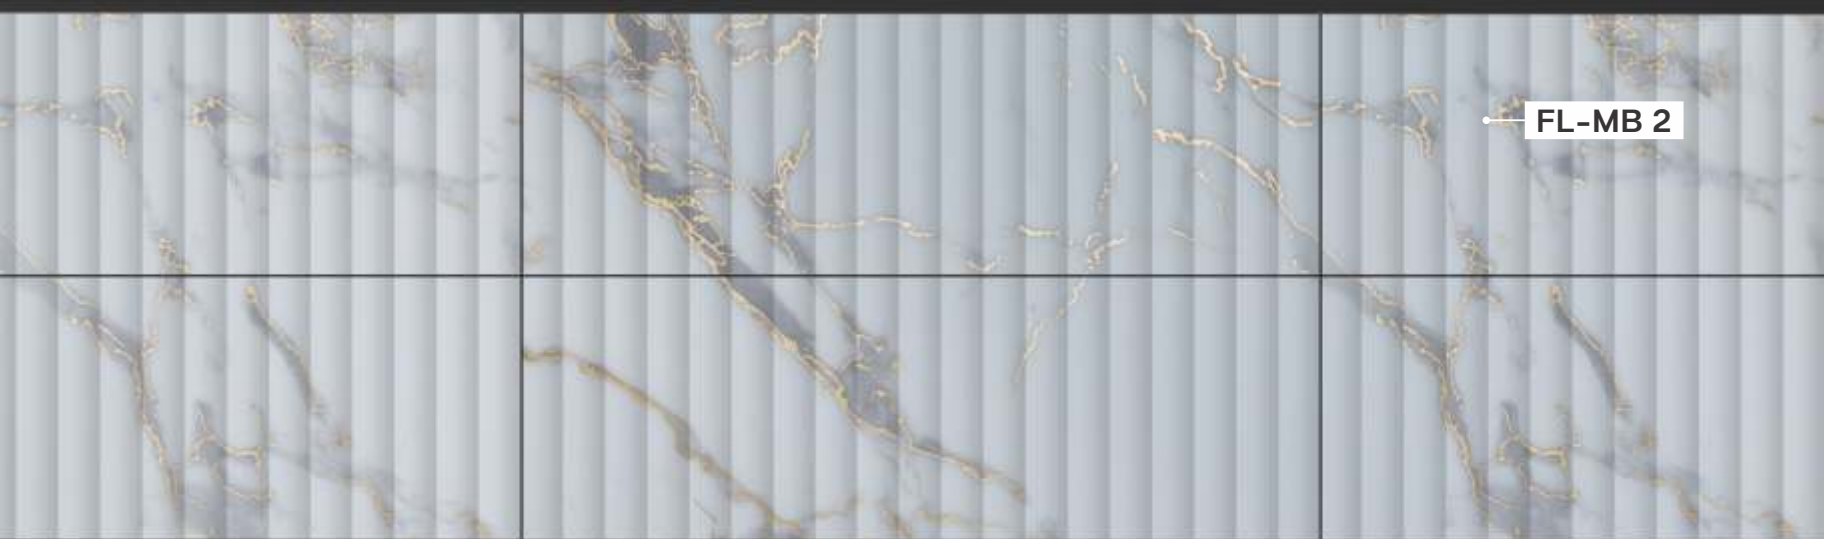

FL-MB 2

FLUTED MARBLE

A rhythmic  
texture that adds depth  
to every design

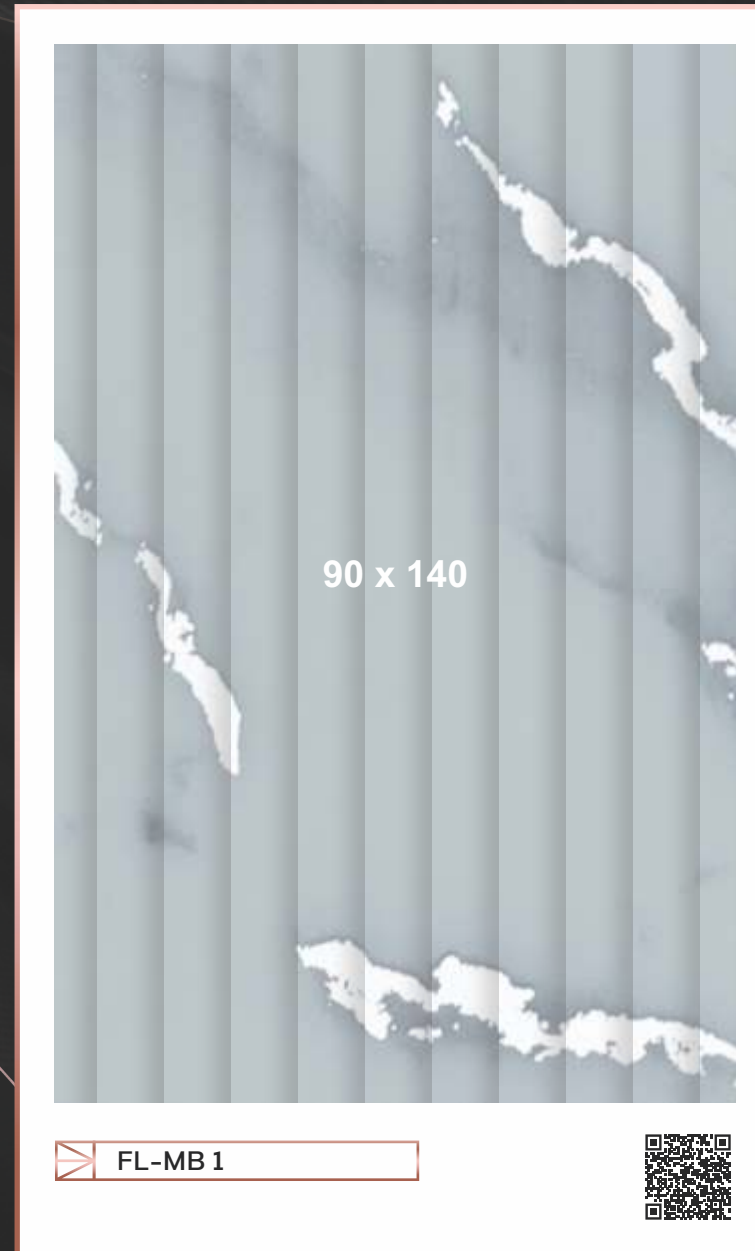

FL-MB 1



FL-MB 2




FLUTED  
3 MM COLLECTION





Subtle patterns  
that transform design  
into art

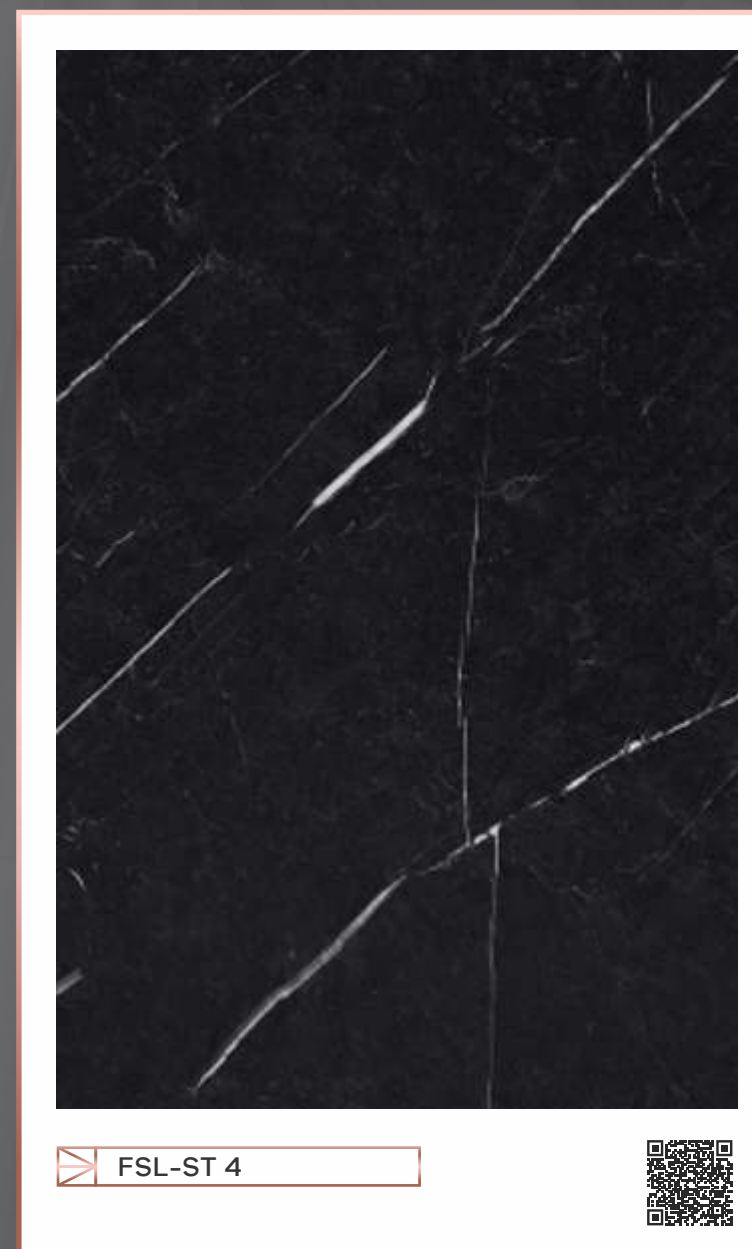

# FLUTED

2.5 MM COLLECTION



SOFT TOUCH

abhiyanlam  
TIMELESS DECOR

The perfect  
balance of softness  
and strength

90 x 140


SM 39

SOFT  
TOUCH  
COLLECTION


SM 2




SOFT TOUCH  
COLLECTION

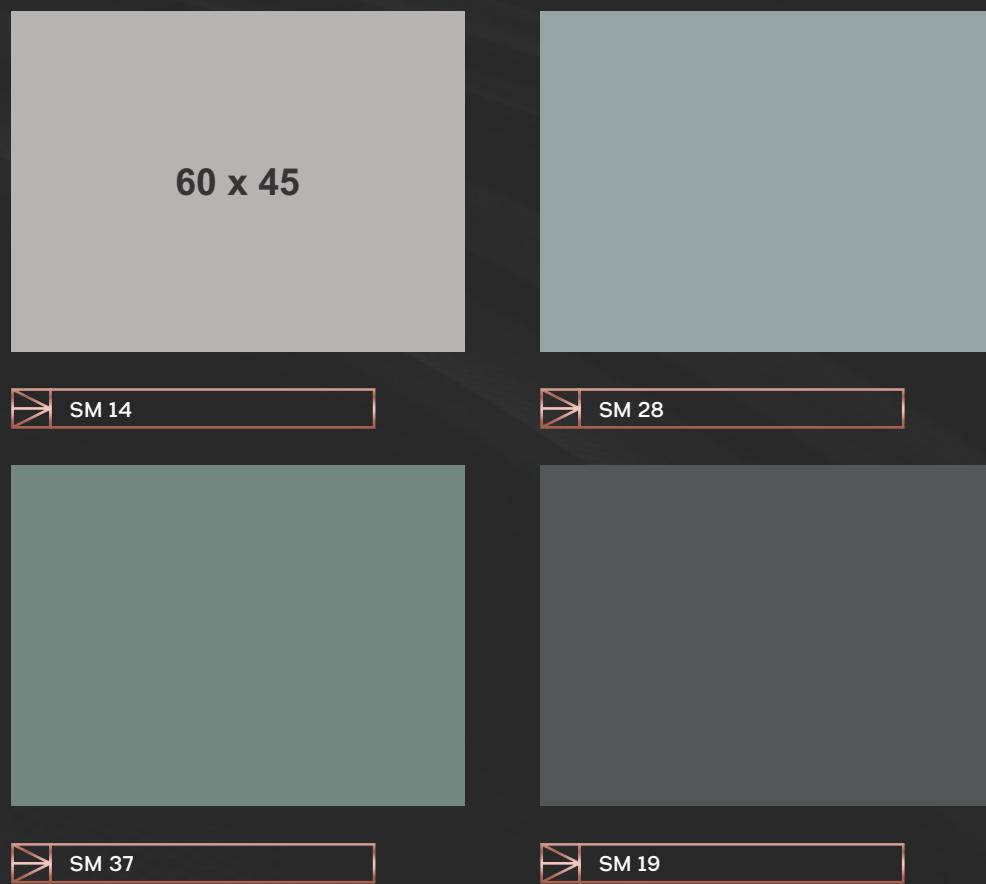

Wrap your space in the  
luxury of softness,  
designed for ultimate comfort

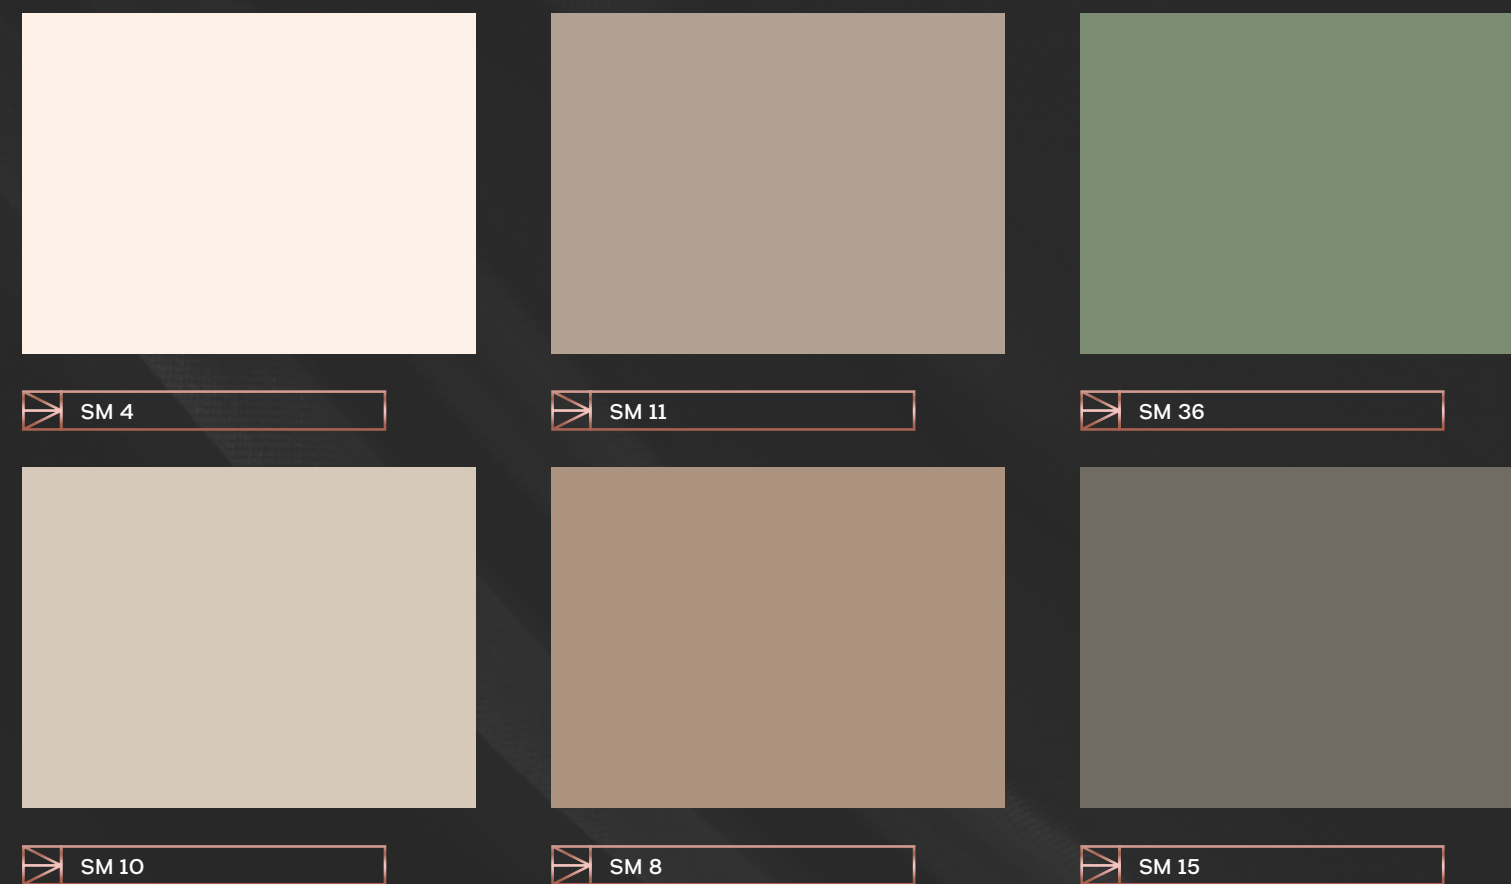


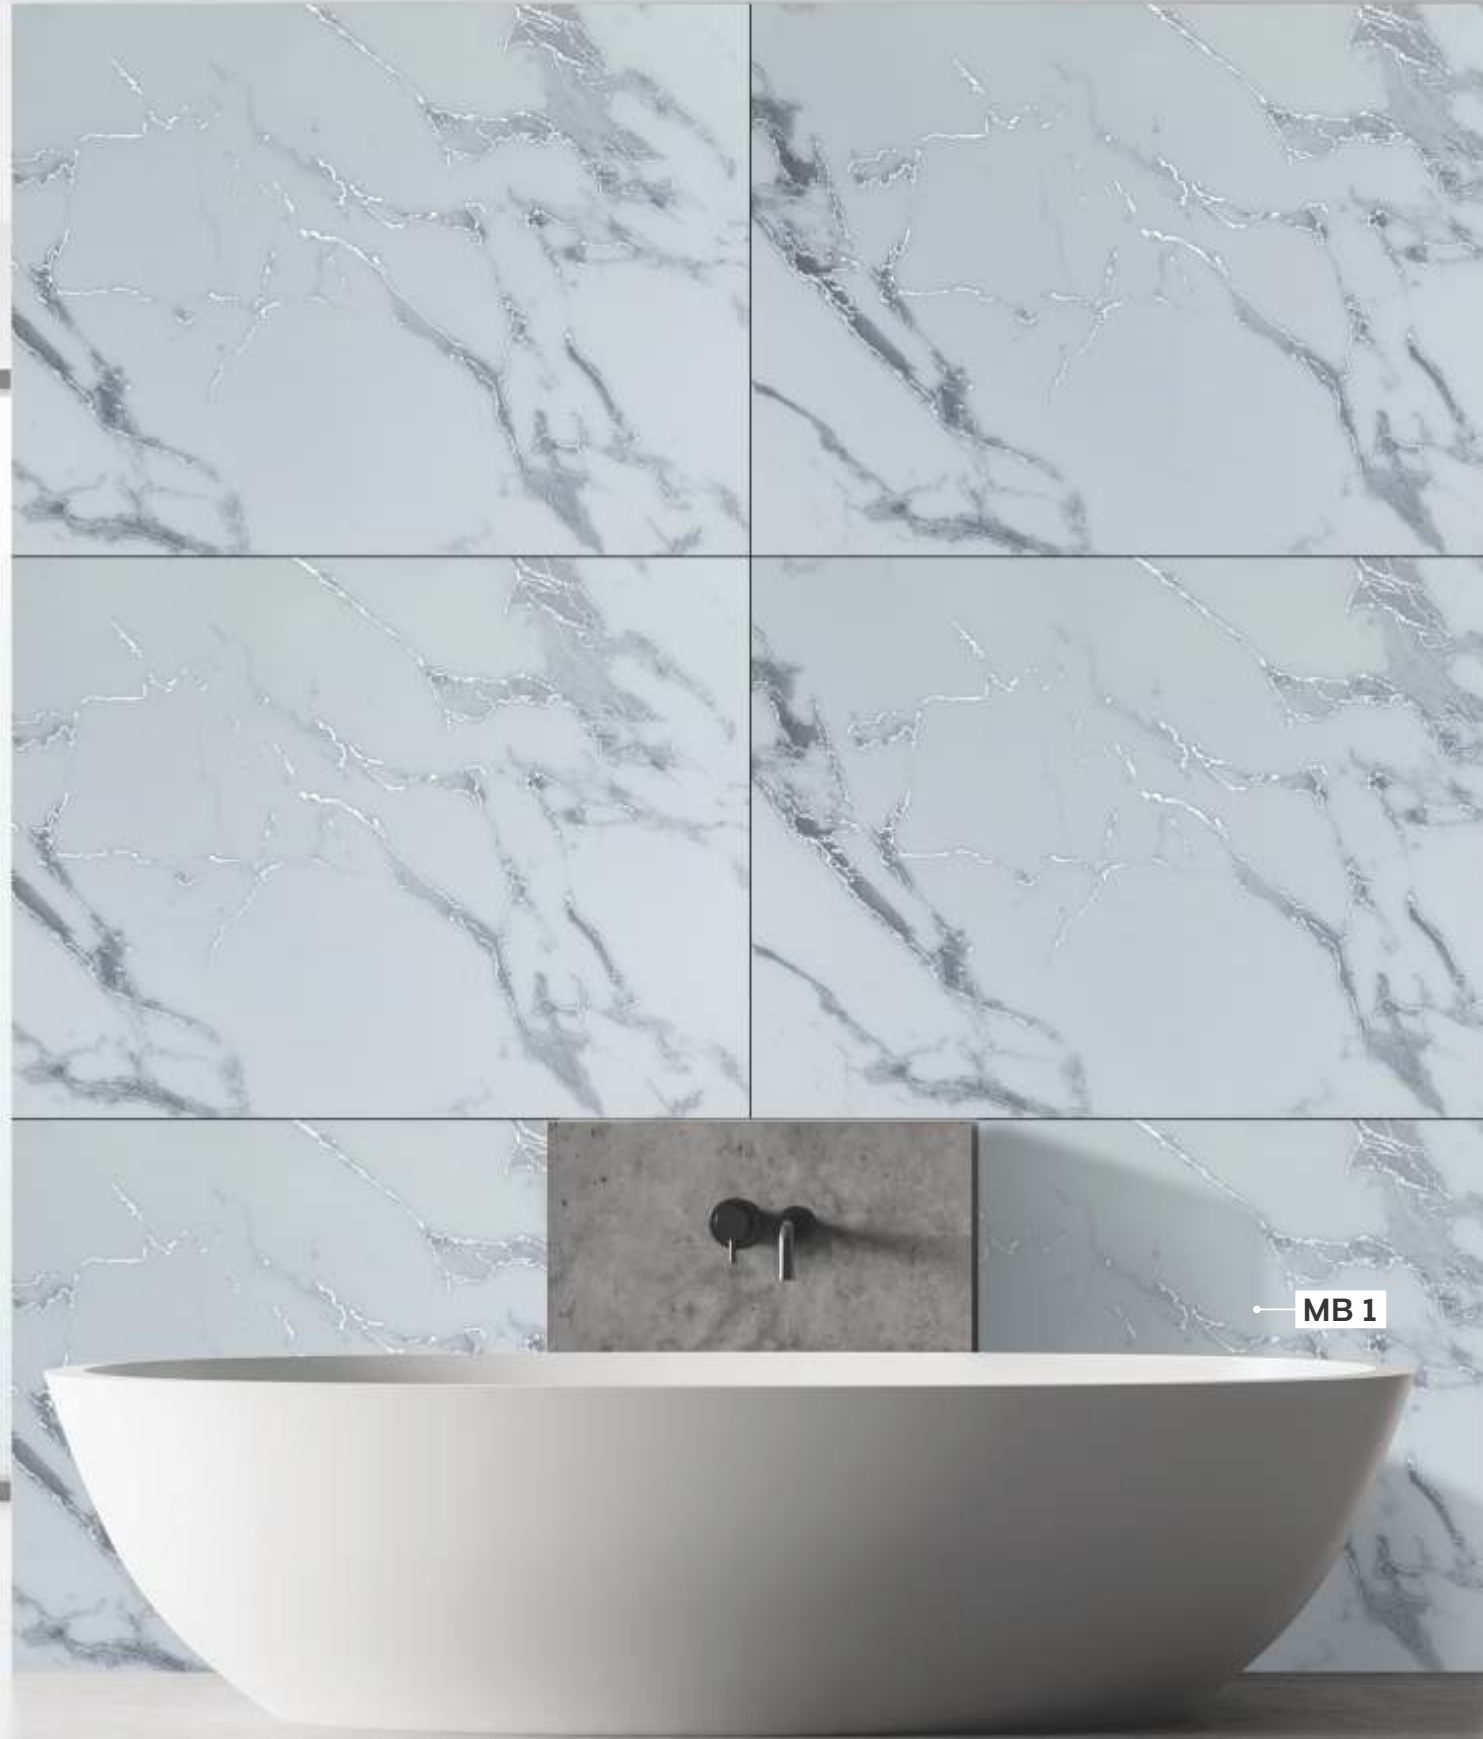

From nature's  
raw beauty to your  
space



MARBLE  
& STONE  
COLLECTION

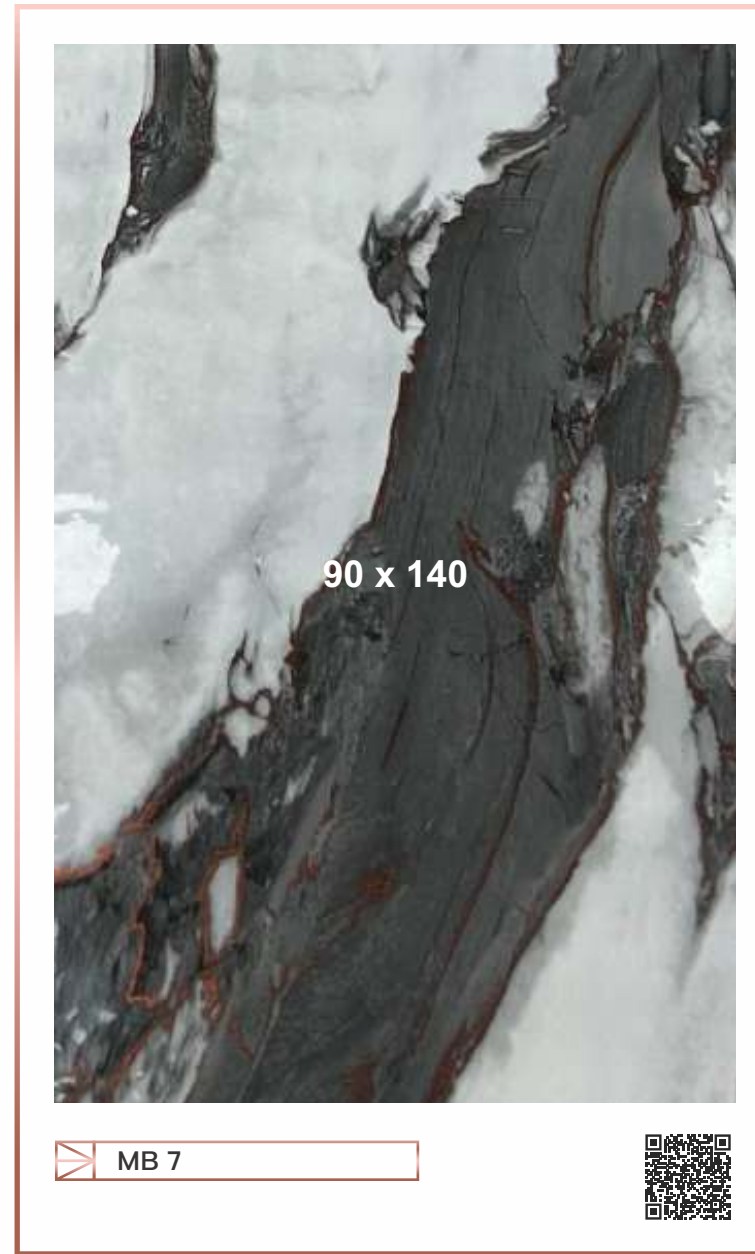

## MARBLE

The essence of luxury  
in every corner

# STONE

SERIES



90 x 140


ST 3



ST 4



Sophisticated yet timeless, a stone finish that elevates every design

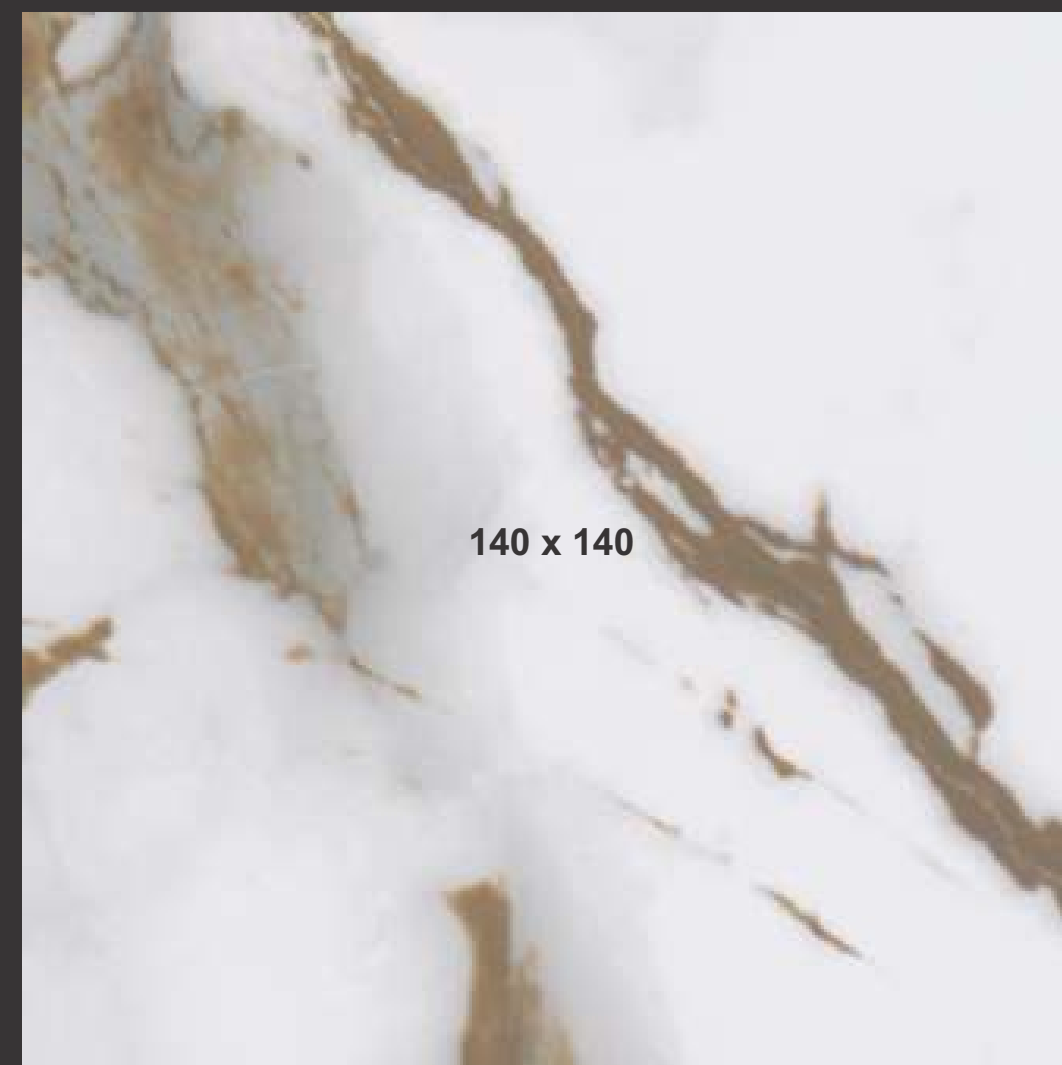

140 x 140

ST 17



Reimagined for spaces that demand attention





90 x 140

ST 20



ST 11



Inspired by nature, crafted for modern spaces with a stone finish



ST 21



90 x 140

ST 14




# EMBRACE






A refined  
touch of glamour for  
your space

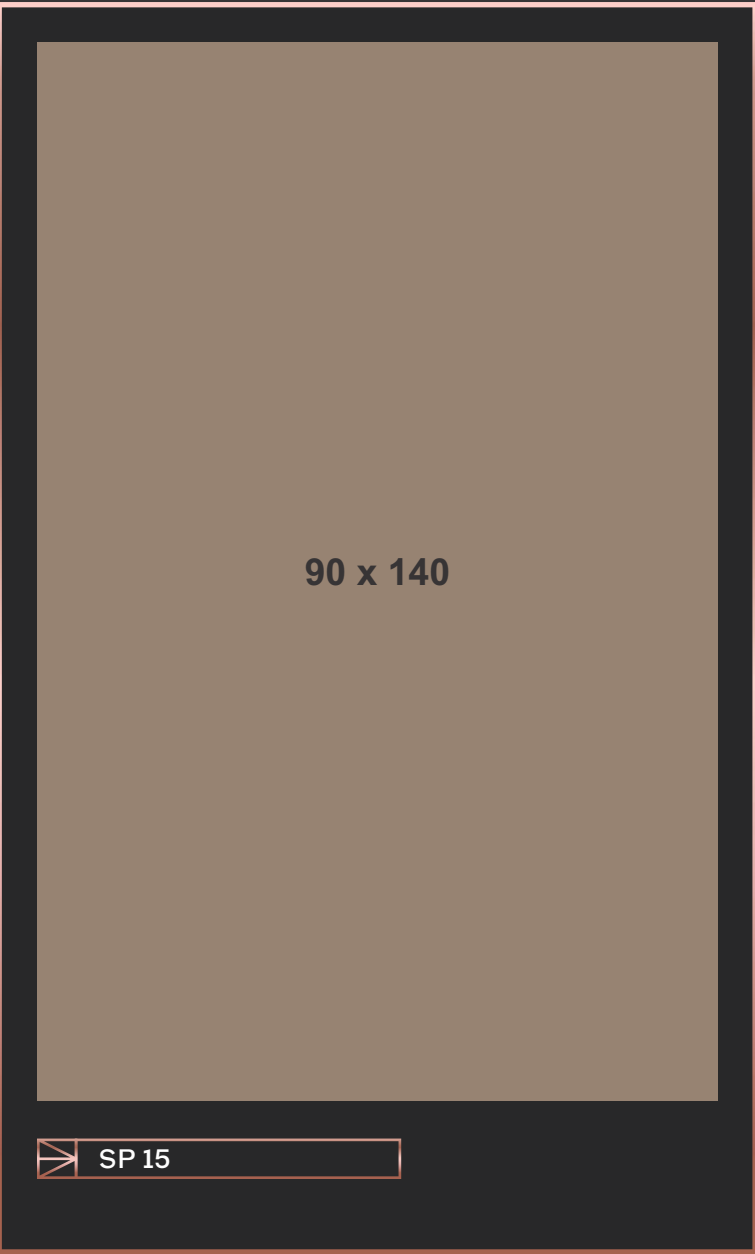

90 x 140

SP 15

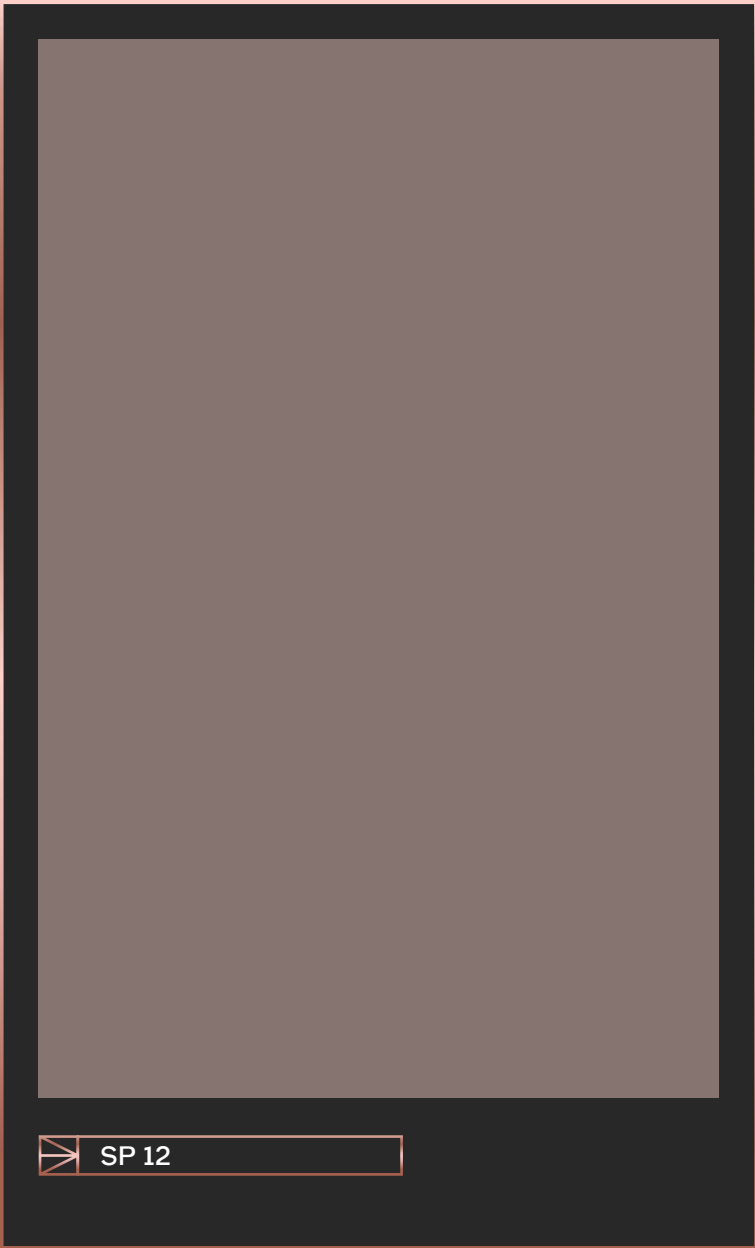


SP 12

# SPARKLE

COLLECTION




SPARKLE

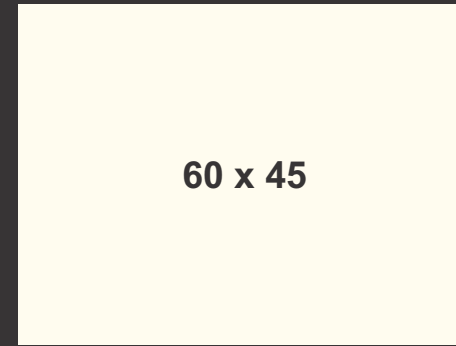


60 x 45

SP 2



SP 3



SP 4



SP 26




SP 21

Light up your space with finishes that reflect elegance.

SUBLIME



A sleek touch for designs that demand attention

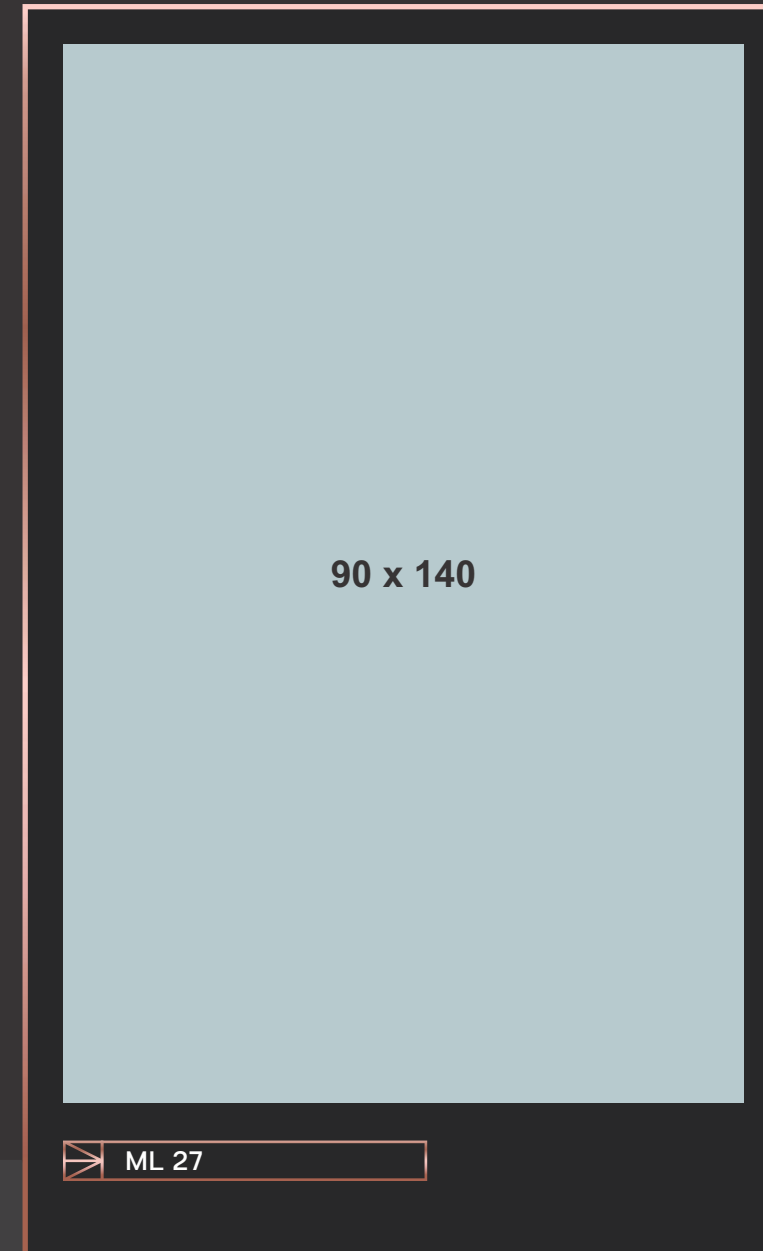


90 x 140

ML 27

# METALLIC

COLLECTION


The perfect  
balance of shine and  
subtlety

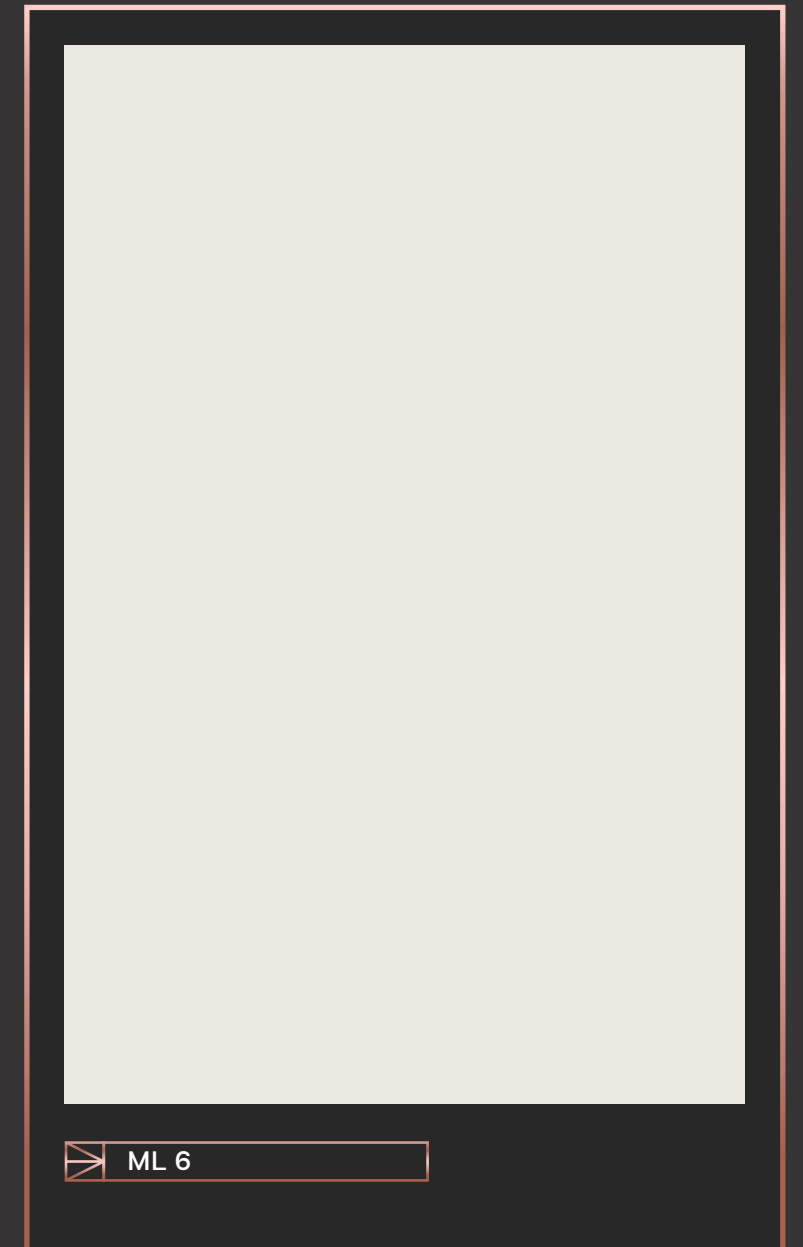

ML 6



METALLIC

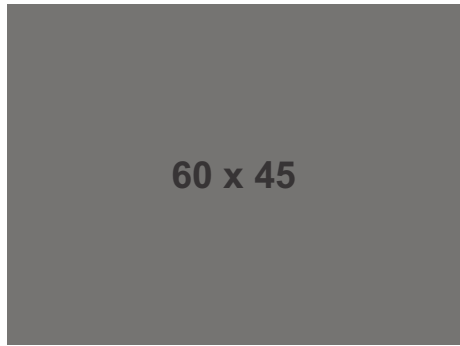

ML 22



ML 25



ML 33



ML 29



ML 30


Created for  
modern interiors

L I N E V E L Y





Feel the power of solid color,  
a foundation of style  
and simplicity

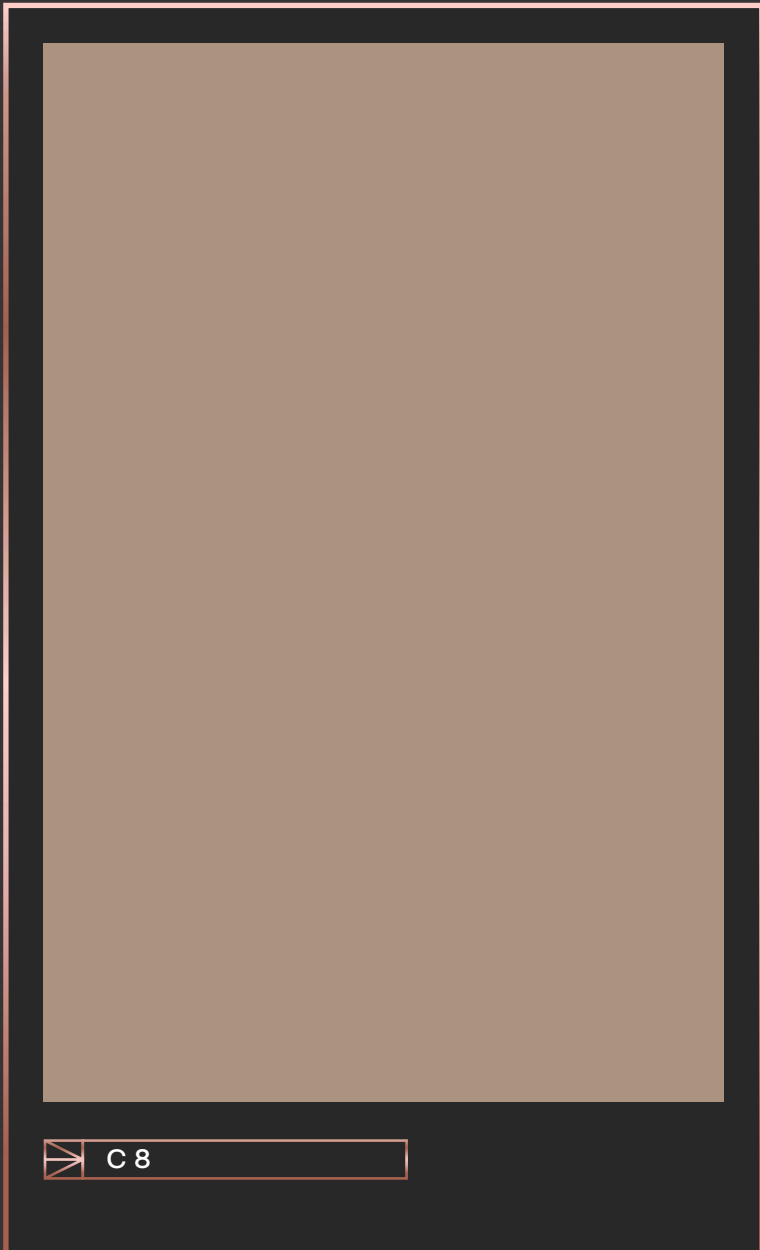


# SOLID


COLLECTION

# COLOR


Bringing endless vibrancy to your space

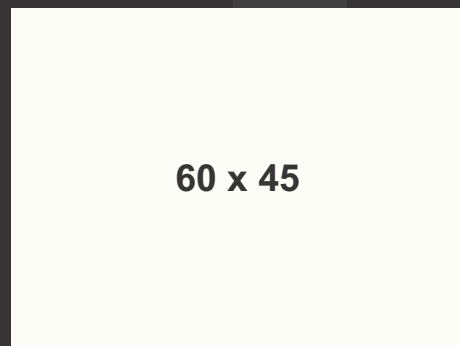


C 1




C 4



C 39



C 12



C 14



C 42




C 49



C 40



C 11

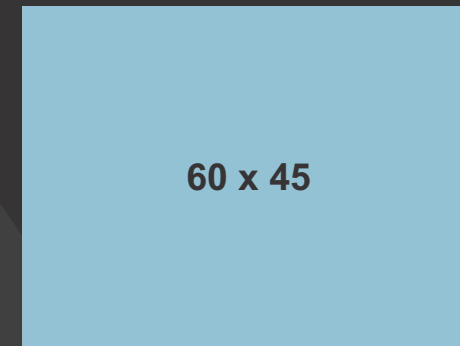

C 43



C 48




C 33



C 37



C 38



C 26





60 x 45

C 29



C 44



C 19



C 23



C 25




C 16




# REFRESH

## MIRROR FINISH

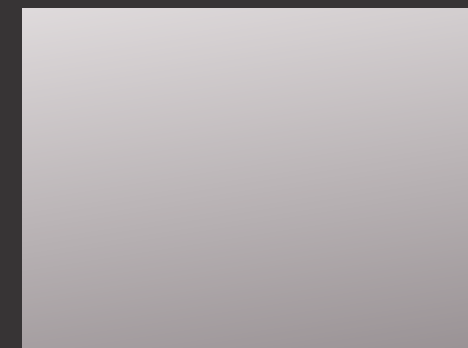

MR 1

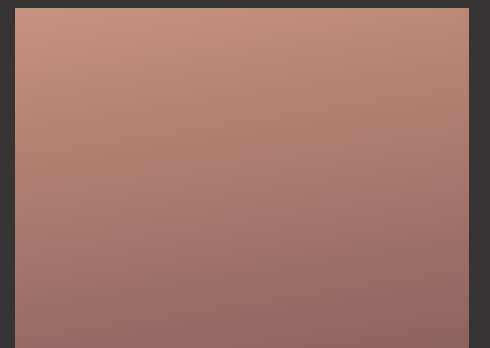

MR 4



MR 3



MR 5



S. NO	TYPE	DSN NO.	PG NO.
1	FLUTED MARBLE (3MM)	FL-MB 1	9
2	FLUTED MARBLE (3MM)	FL-MB 2	10
3	FLUTED MARBLE (2.5MM)	FSL-ST 20	12
4	FLUTED MARBLE (2.5MM)	FSL-ST 4	12
5	SOFT TOUCH	SM 39	14
6	SOFT TOUCH	SM 2	14
7	SOFT TOUCH	SM 14	15
8	SOFT TOUCH	SM 28	15
9	SOFT TOUCH	SM 37	15
10	SOFT TOUCH	SM 19	15
11	SOFT TOUCH	SM 4	16
12	SOFT TOUCH	SM 11	16
13	SOFT TOUCH	SM 36	16
14	SOFT TOUCH	SM 10	16
15	SOFT TOUCH	SM 8	16
16	SOFT TOUCH	SM 15	16
17	MARBLE	MB 1	18
18	MARBLE	MB 2	18
19	MARBLE	MB 7	20
20	MARBLE	MB 8	20
21	STONE	ST 3	21
22	STONE	ST 4	21
23	STONE	ST 17	22
24	STONE	ST 20	23
25	STONE	ST 11	23
26	STONE	ST 21	24
27	STONE	ST 14	24
28	SPARKLE	SP 15	26
29	SPARKLE	SP 12	26
30	SPARKLE	SP 2	28
31	SPARKLE	SP 3	28
32	SPARKLE	SP 4	28
33	SPARKLE	SP 26	28
34	SPARKLE	SP 21	28

S. NO	TYPE	DSN NO.	PG NO.
35	METALLIC	ML 27	30
36	METALLIC	ML 6	30
37	METALLIC	ML 22	32
38	METALLIC	ML 25	32
39	METALLIC	ML 33	32
40	METALLIC	ML 29	32
41	METALLIC	ML 30	32
42	GLASSY COLOUR	C 6	34
43	GLASSY COLOUR	C 8	34
44	GLASSY COLOUR	C 1	35
45	GLASSY COLOUR	C 4	35
46	GLASSY COLOUR	C 39	35
47	GLASSY COLOUR	C 12	35
48	GLASSY COLOUR	C 14	35
49	GLASSY COLOUR	C 42	35
50	GLASSY COLOUR	C 49	35
51	GLASSY COLOUR	C 40	35
52	GLASSY COLOUR	C 11	35
53	GLASSY COLOUR	C 43	36
54	GLASSY COLOUR	C 48	36
55	GLASSY COLOUR	C 33	36
56	GLASSY COLOUR	C 37	36
57	GLASSY COLOUR	C 38	36
58	GLASSY COLOUR	C 26	36
59	GLASSY COLOUR	C 29	37
60	GLASSY COLOUR	C 44	37
61	GLASSY COLOUR	C 19	37
62	GLASSY COLOUR	C 23	37
63	GLASSY COLOUR	C 25	37
64	GLASSY COLOUR	C 16	37
65	MIRROR	MR 1	38
66	MIRROR	MR 4	38
67	MIRROR	MR 3	38
68	MIRROR	MR 5	38

Reasons for air bubble formations on acrylic sheets



Acrylic is bonded in extremely humid conditions.



Use of water based synthetic resin adhesive any other than PEVA (Polyethylene Vinyl Acetate Co-polymer).



Debonding in certain areas because of uneven substrate surface.



Insufficient lack of pressing during the bonding period of laminate.



When the substrate loses moisture after installation.



Use of extremely large Acrylic/PVC laminate sheets.

To avoid delamination/air bubbles in between ply and laminate the above steps should be taken care of Bonding of acrylic sheets shouldn't be completed under high humidity.

DISCLAIMER

The products are tested to be reasonably free of defects, and when used and fabricated properly they will comply with the applicable manufacturing specifications within realistic deviations. We recommend customers to inspect product property before installing. Product's warranty in no way covers defects and non-compliance from or otherwise attributable to any other causes, including, without limitation the following:

- \* Improper handling/transportation/storage
- \* Improper installation
- \* Improper or unintended usage
- \* Lack of or improper maintenance
- \* Exposure to high temperatures
- \* Unauthorized alteration to the product
- \* Outdoor applications
- \* Do not use plywood with high moisture content
- \* Do not use ply with uneven surface
- \* Avoid using inferior quality adhesive
- \* Apply sufficient pressure
- \* Avoid pasting or sheets on the printed/branding area of the plywood

CARE OF LAMINATES

Abhiyan Laminates are manufactured with aesthetics and durability in mind. When used as recommended and with appropriate care, our laminates will last through the years and are easy to maintain.

- \* Cleaning should be done with water and clean non-abrasive cloth
- \* To remove more stubborn stains, use mild household cleaners like Colin IP gently wipe down with a non-abrasive cloth.
- \* Avoid the use of abrasive liquid cleaners, bleaching compounds or solution as these may damage the surfaces of the laminate.
- \* Do not place hot cookware directly on the laminate. Prolonged exposure to temperatures above 30 degree Celsius may cause damage to the laminate surface
- \* Do not use the laminate for a purpose that it is not intended for (Eg. do not iron, chop, hammer or expose the laminate to open flame).
- \* Outdoor application of the laminate with exposure to direct sunlight and weather conditions are not recommended.
- \* UV rays may reshape the laminate
- \* Gloss surfaces are recommend only for vertical application
- \* Do not use thinner and lolvane on the surface of the Signature laminates. This may cause decolourisation of the surface.
- \* Typically confirm to internationally recognize technical standards.
- \* Have a thickness balance of ±10%
- \* Peel off the protective film after processing.

