

WONDERFLOOR

www.wonderfloor.co.in

HITECH



**MADE
in
INDIA**

Premium Printed Flooring

HITECH



552402



552403



552405



552701



552702



552705



552707



553402



553404



553405



553406



554501

HITECH



554502



554503



554505



554506



554911



554912



554913



555603



555604



556801



556803



556804

HITECH



557501



557502



557503



557504



557505



558501



558502



558503



558504



559501



559502



559503

WONDERFLOOR

www.wonderfloor.co.in

HITECH



559504



559505



APRICOT ORANGE



CANDY RED



LAWN GREEN



LEMON YELLOW



SEA BLUE

WONDERFLOOR

www.wonderfloor.co.in


HITECH



CP SPA - Bangalore



CORINZO Window System, Hyderabad

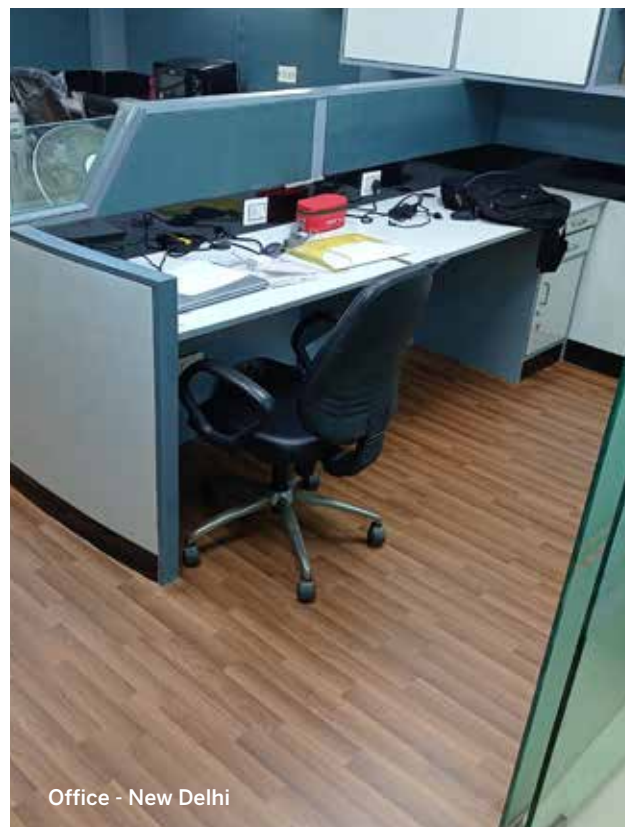

Office - New Delhi

WONDERFLOOR - The world-class vinyl flooring is a quality product from RMG Polyvinyl India Limited, an ISO 9001:2015 systems certified company. We are the largest manufacturer & exporter of PVC floor coverings, film, sheeting and artificial leather. We manufacture a wide range of vinyl flooring in state-of-the art plant & machinery equipped with latest technology and optimum quality control. Wonderfloor has a wide sales distribution network across India.

HITECH is a high quality printed vinyl flooring. The wear layer is of a thicker type as compared to thinner floorings which make it suitable for semi-commercial use. The choice of patterns includes wooden, stone and marble. It is an ideal flooring for small offices, residence, small hotels & shops, back offices in schools & hospitals, etc.

PERFORMANCE CHARACTERISTICS

CHARACTERISTICS	TEST METHOD	HITECH
THICKNESS (mm)	EN 428 / ISO 24346	1.30
ROLL WIDTH (mtr)	EN 426 / ISO 24341	2.00
ROLL LENGTH (mtr)	EN 426 / ISO 24341	20
TOTAL WEIGHT (kgs/sq mtr)	EN 430 / ISO 23997	2.35
SLIP RESISTANCE	DIN 51130 / ASTM D2047	R9 / PASS
RESIDUAL INDENTATION (mm)	EN 433 / ISO 23343-1	≤ 0.10 mm
FLEXIBILITY (mm)	EN 435 / ISO 24344	40 mm MANDREL. PASSES
DIMENSIONAL STABILITY (%)	EN 434 / ISO 23999	≤ 0.40%
BEARING CASTOR CHAIR	EN 425 / ISO 4918	SUITABLE / CONTINUOUS
FIRE PROPAGATION	BS 476 PART 6	(I)=10.8 (II)=1.7 } CLASS "O"
SURFACE SPREAD OF FLAME	BS 476 PART 7	CLASS 1
PERFORMANCE CLASSIFICATION	EN 685 / ISO 10874	32
ABRASION RESISTANCE	EN: 660-2	WEAR GROUP M
SOUND ABSORPTION	ISO 140-8/EN ISO 717-2	Δ LW = 3db
COLOUR FASTNESS	ISO 105-BO2	> BLUE WOOL STANDARD 4



RECOMMENDATION FOR INSTALLATION

Wonderfloor sheet must be allowed to relax for 24 hours in room temperature between 18°C and 27°C prior to installation. Vinyl rolls are suitable for laying on any surface such as concrete, steel wooden floors etc. provided the sub-floor is even, hard and dry. Damp floors should be dried before the commencement of laying. Before installation, the base floor must be thoroughly clean, dry and free from grease & grit. Wonderfloor recommends use of Fevicol SR 998, Fevicol SR 505 or any other equivalent rubber/acrylic/water based adhesive of similar type.

MAINTENANCE

- Do's:
- After laying of flooring, the surface should be cleaned daily with damp mop and weekly or fortnightly with soap solution
 - Prevent point load indentation by covering your furniture legs with rubber stopper caps
 - To remove stubborn stains, rub the affected area immediately with a soft coir brush or fine steel wool soaked in a warm soap solution
 - Scuff marks on the floor can be removed with little application of diesel
 - Use door coir or suitable mats to minimize accumulation of dust on Wonderfloor vinyl flooring
 - Use water to remove any chemical spill on flooring.
- Don'ts:
- Do not use any strong detergent, harsh cleaning agent or dry steel wool
 - Throwing of lighted cigarette butts or match sticks on the floor should be avoided as it could lead to burn marks on the floor
 - Do not drag any heavy object or furniture on the flooring to avoid scratches on the floor.

For institutional/bulk enquiries, please e-mail : mkt@rmgpoly.com
or call : +91 9015313059 (Available between 10am-6.30pm)
For export enquiries, please e-mail : info@rmgpoly.com or call : +91 9873138885

RMG POLYVINYL INDIA LIMITED
WONDERFLOOR is the registered Trade Mark of RMG Polyvinyl India Limited

