

# HOMOGENEOUS FLOORING





34-43



2062 Beach



2084 Cream



2061 Sand



2077 Latte



2060 Sahara



2059 Camel




2057 Coffee

## WALL COVERING



3008

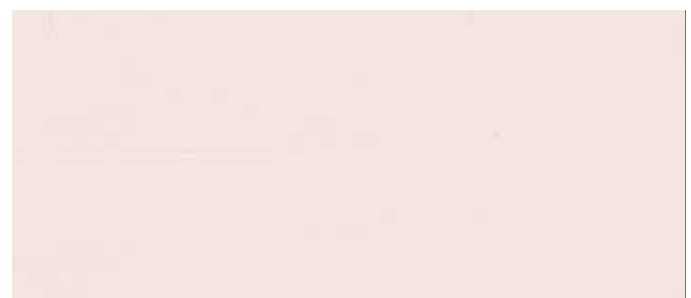


3010




34-43



2070 Ink blue

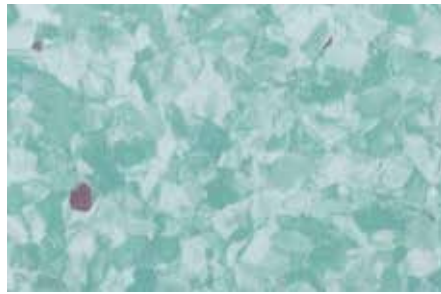

2063 Emerald

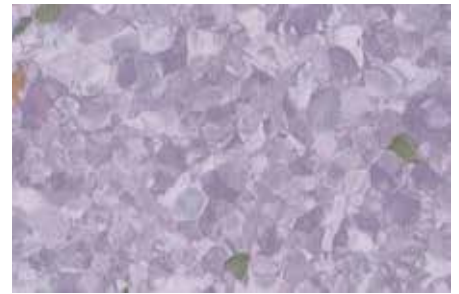

2075 Lavander



2069 Sky



2066 Forest




2065 Bamboo



2081 Cobalt



2068 Sea Blue

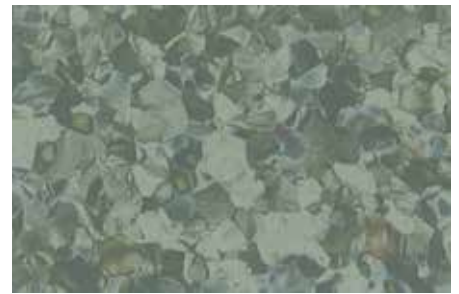

2064 Hunting



2067 Pool



2082 Ocean




2076 Storm


## WALL COVERING



3005

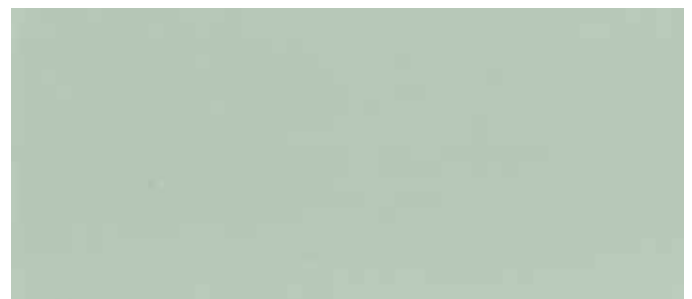

3006

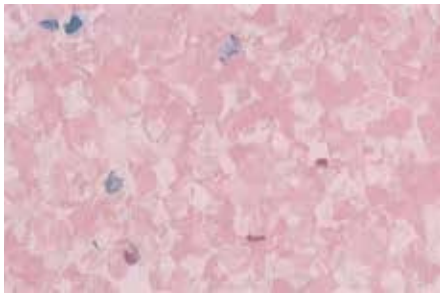

2083 Candy





2078 Corn



2073 Vanilla



2079 Capuccino

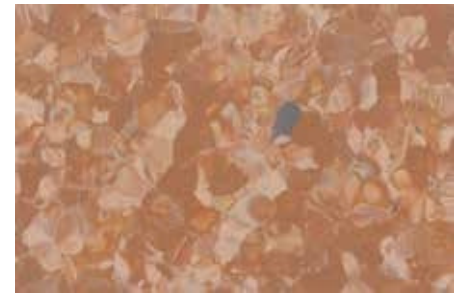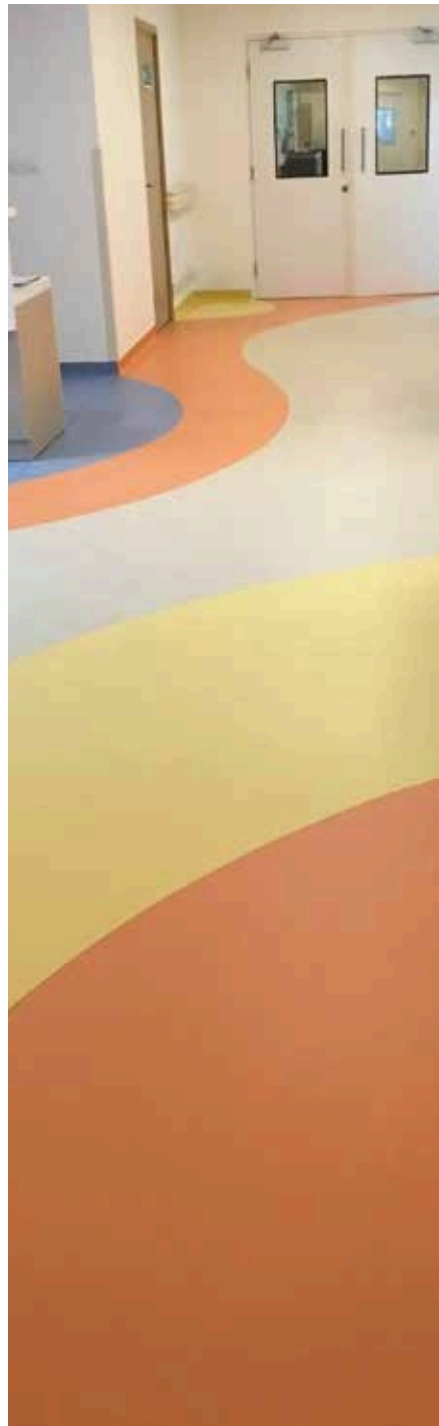

2080 Espresso



2074 Pumkin




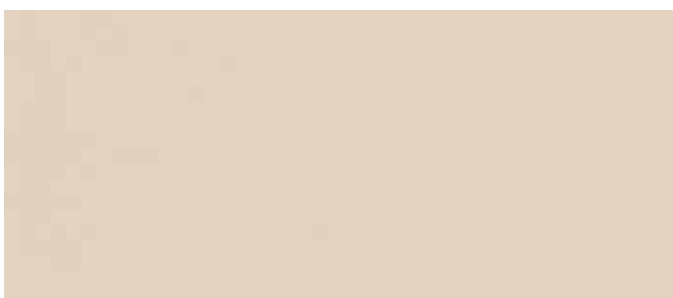
2072 Terracotta




2071 Imperial Red

### WALL COVERING

 Dimension: 1mm x 2.0m x 20m



3004

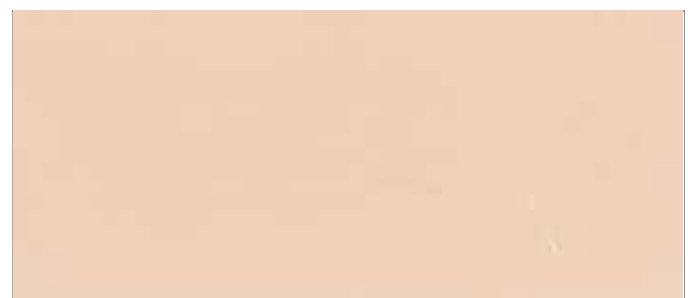

3009




34-43




0043 Sandy Beige



0052 Primrose

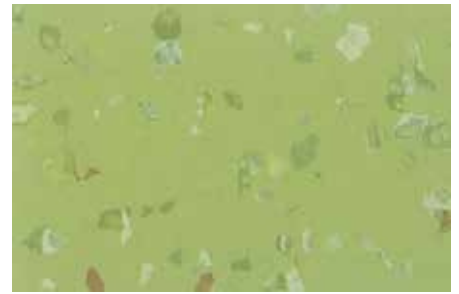

0045 Turquoise

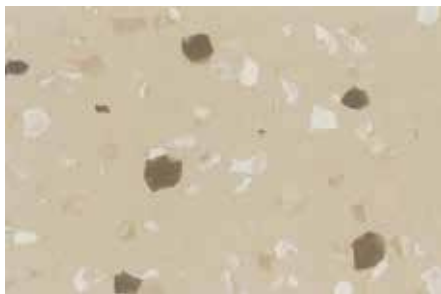

0057 Honey



0051 Orange




0047 Emerald Green




0048 Wheat




0054 Sienna

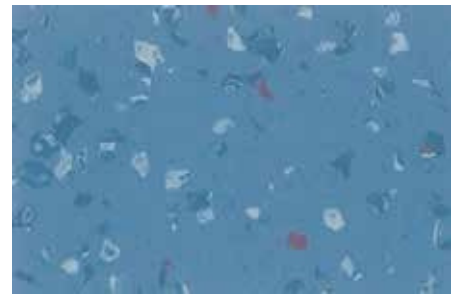

0044 Slate Blue

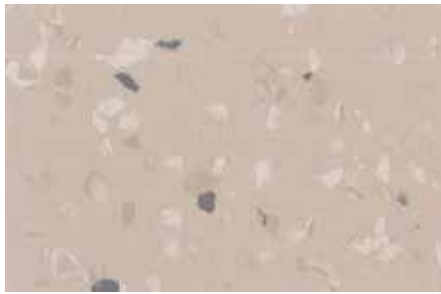

0056 Apricot

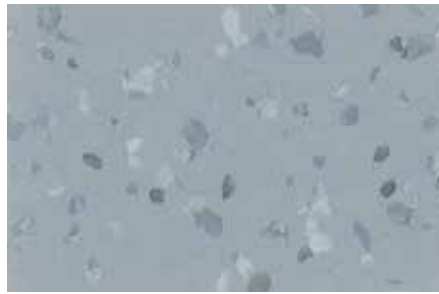


0053 Misty Grey



0050 Royal Blue



0049 Milky Coffee

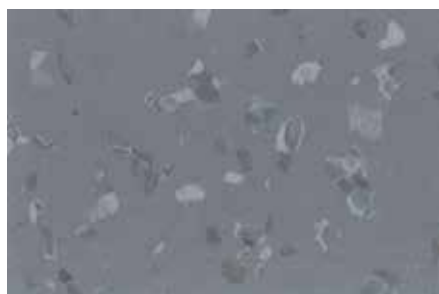

0055 Steel Grey



0046 Violet



34-43



2055 Opale



2058 Fog




2054 Cloud



2053 Mouse



2052 Ash

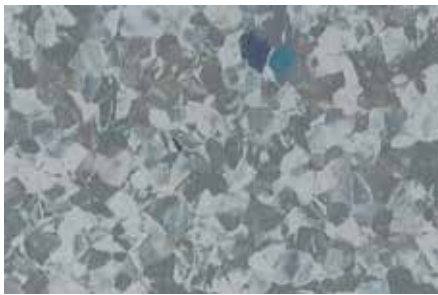

2051 Charcoal




2056 Deer




2050 Mid night

## WALL COVERING

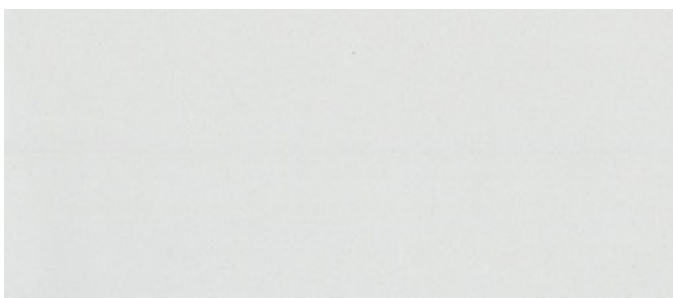

3011

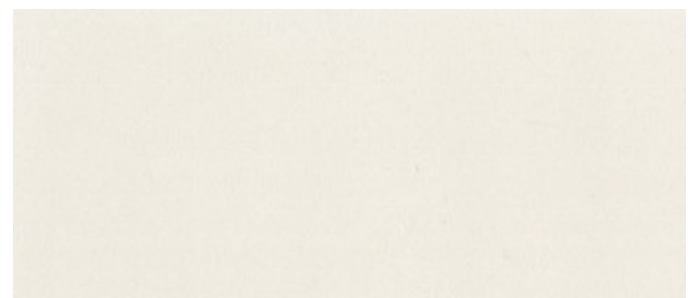

3001



## LCA

- Manufactured in an ISO 14001: 2015 certified
- Product specific EPD (Environmental Products Declaration) available
- Eco-designed according to a product specific Life Cycle Analysis
- Contribution to many Green Building Schemes
- Surface treatment PUR+ Iodine free protected to reduce drastically the use of chemical products and water and ensure the lowest environmental impact



## INDOOR AIR QUALITY

- TVOC emissions 100 times better than norm requirements (TVOC < 10 µg/m<sup>3</sup> after 28 days)
- SGS certified
- No formaldehyde emission



## WELLNESS

### Health

- Antibacterial activity (Inhibits growth > 99%)

### Comfort

- Walking comfort < 75 dB



## COMPOSITION

100% REACH compliant

- FREE of formaldehyde
- FREE of heavy metals
- FREE of Solvent



## RECYCLABILITY






- 100% recyclable product



## RECYCLED CONTENT

- 100% REACH compliant recycled content

## TECHNICAL SPECIFICATIONS

DESCRIPTION			
Total thickness	EN 428	mm	2.0
Weight	EN 430	g/m <sup>2</sup>	2800
Width of sheet	EN 426	m	2
Length of sheet	EN 426	lm	20
CLASSIFICATION			
European classification	EN 685		23-33
Fire rating	EN ISO 9239-1 EN ISO 11925-2	Class	Bfl-s1
Toxic testing	GB 18586-2001		Good
Static electrical propensity	EN 1815	KV	≤ 2
Electrical resistance / Anti Static	EN 1081	Ω	109-10 <sup>0</sup>
Slip resistance	DIN 51130	Class	R9
PERFORMANCES			
Dimensional stability	EN 434	%	≤ 0.4
Thermal conductivity	EN 12524	W/(m.k)	0.25
Castor wheel test	EN 425	-	OK
Wear resistance	EN 660.2	mm <sup>3</sup>	≤ 2.0
Abrasion Group	EN 649	group	T
Type binder content	ISO 10581	type	I
Residual group	EN 433	mm	--~ 0.02
Colour fastness	EN 20 105 B02	degree	≥ 6
Chemical product resistance	EN 423	class	OK
Antibacterial property MRSA	ISO 22196	-	>99% inhibits growth
Flexibility	ISO 8690	-	Good
Decontamination rated	EN 435	-	Very good
Impact sound reduction	EN ISO 10140/1 EN ISO 717/2	-	Approx.+4DB
Surface treatment		UV Protected	PUR+ Iodine stain free
ENVIRONMENT / INDOOR AIR QUALITY			
TVOC after 28 days	ISO 16000 - 6	µg/m <sup>3</sup>	<10
CE MARKING			
	EN 14041		 DS  Bfl-s1 

Be connected!



#Jeoflor



Our related products!



Floor  
Self Leveling



Wall Coverings  
& Protections



Skirting &  
Profiles



Handrails

